V2B

Standard Wiring

Vannetti
Bass Designs
High Performance Sound


Bass: +/-12dB @ 67Hz

Dual Presence Filter:

Hi-Mid: Wide-band, +/-16dB @ 2.8kHz Cf


Treble: +/-14dB @ 6.3kHz

Volume & Blend values dependent on pickups:
Use 25k for Active (Low Impedance) pickups;
250k for Passive (High Impedance) pickups

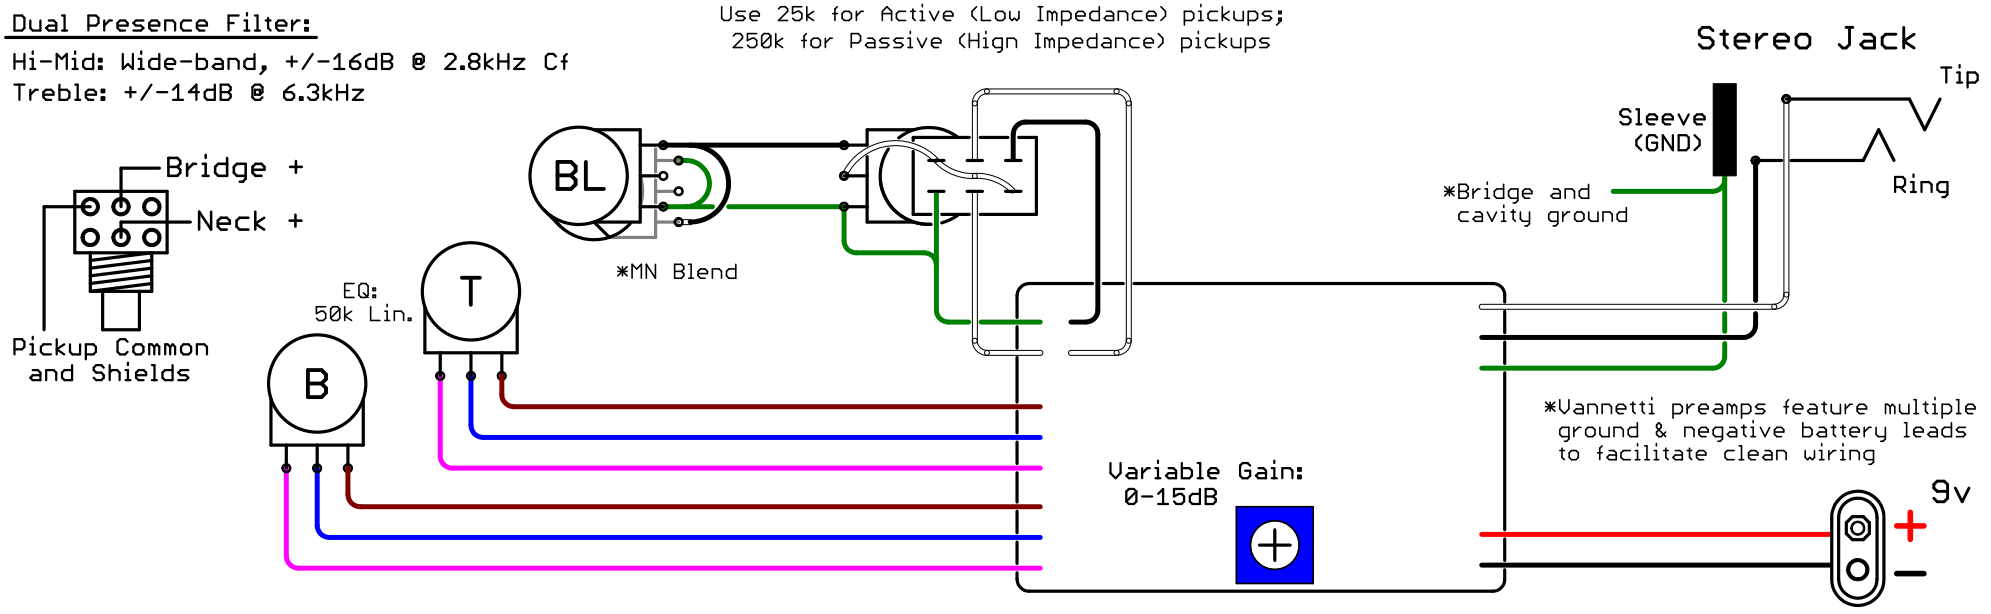


Filter Switch: Push-Pull


Push: Hi-Mid; Pull: Treble

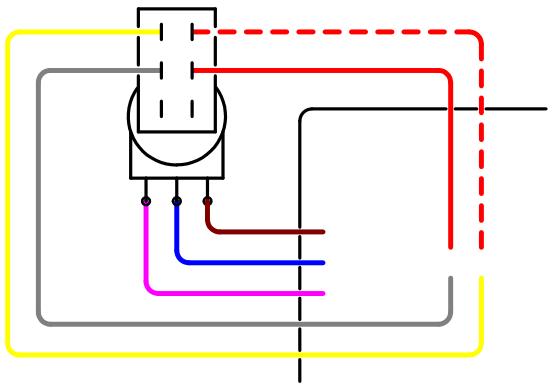

Filter Switch: Toggle

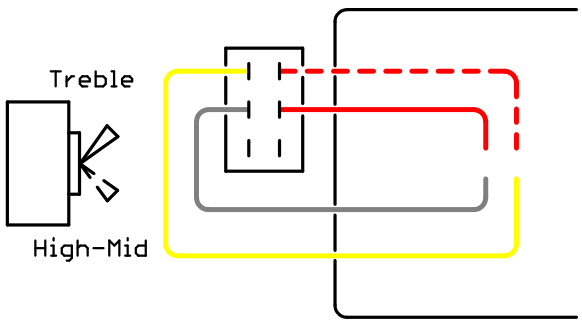

Active/Passive Toggle

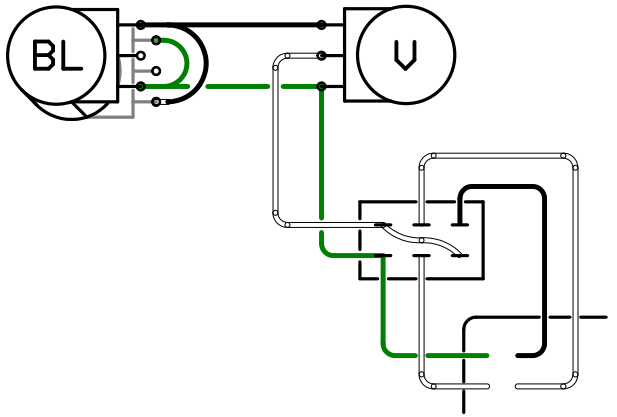

*Wired as shown, inserting 1/4" mono cable into stereo jack will apply power to V2B. Remove cable when not in use to preserve battery life.

All pots and switches shown bushing down.