
Aguilar OBP3: volume - Treble/Bass Stack - mid with pushpull freq selector - active/passive switch

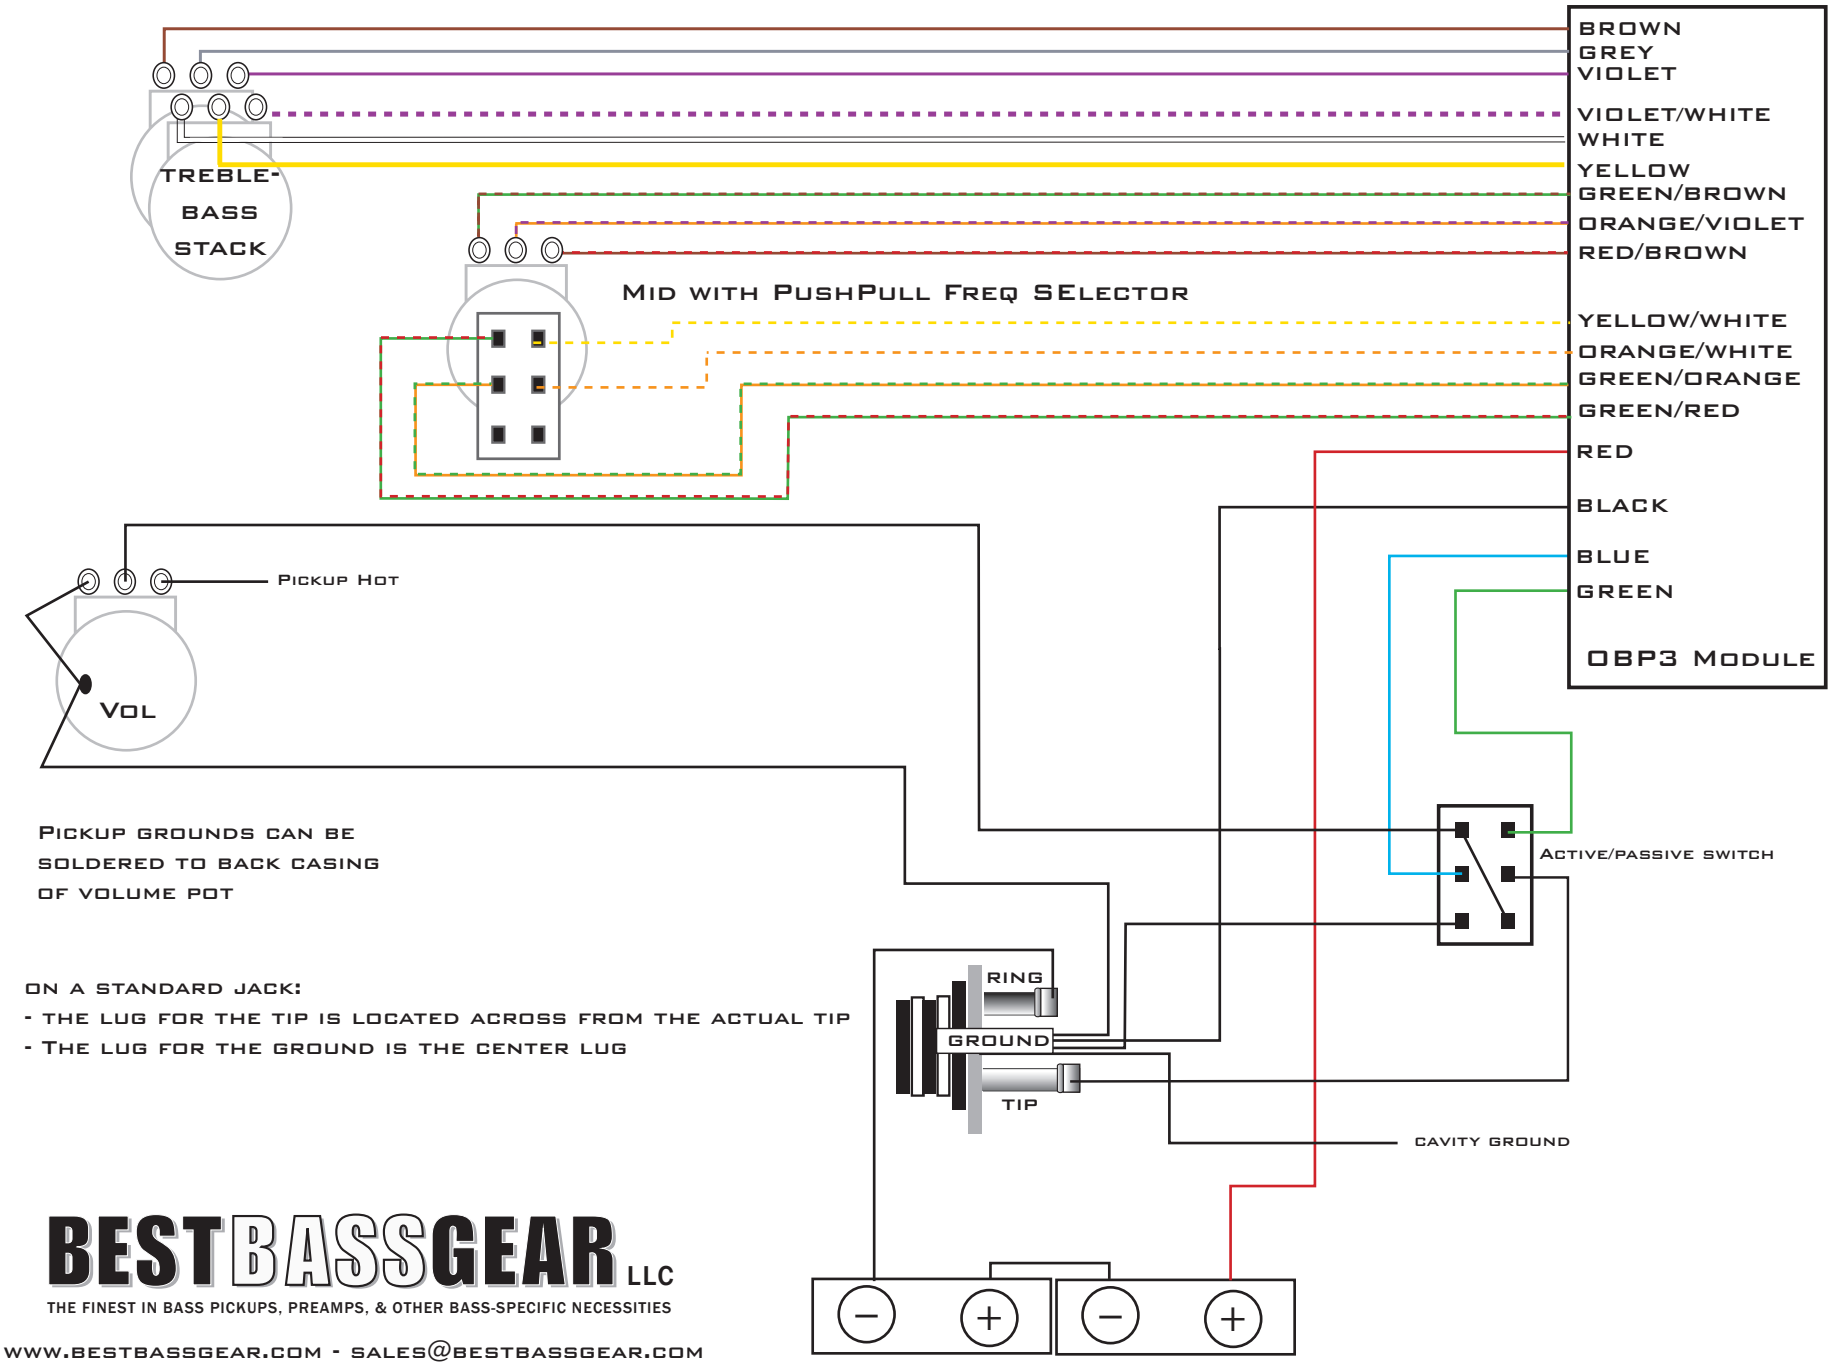

Pickup grounds can be soldered to back casing of volume pot

on a standard jack:
- the lug for the tip is located across from the actual tip
- The lug for the ground is the center lug

BESTBASSGEAR LLC

THE FINEST IN BASS PICKUPS, PREAMPS, & OTHER BASS-SPECIFIC NECESSITIES

www.bestbassgear.com - sales@bestbassgear.com

9 or 18 volts can be used with the obp2/obp3 preamps. For 9 volt use, connect the negative from the battery terminal to the ring on the jack.